
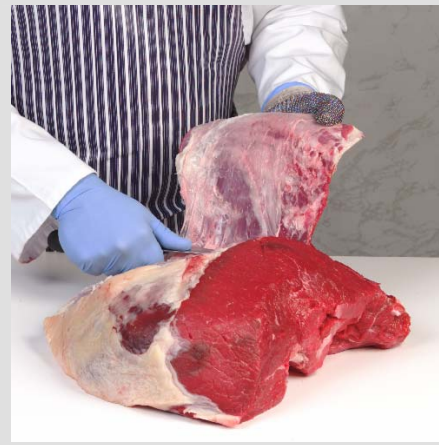


# Topside Joints (without gracilis)

## Topside B003

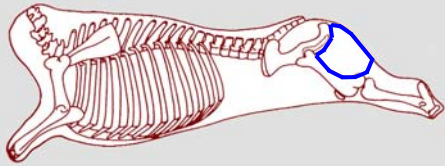

1. Position of the topside.

2. Remove the loosely attached muscle (gracilis) by cutting along the natural seam.

3. Boneless trimmed topside ready for further preparation.

4. Cut the topside into three equal sized portions.



5. Add a 5mm thick layer of fat to lean surface parts on the top of the joint and tie securely with string at regular intervals.

6. Topside roasting joints prepared and ready to cut into joints of the required size.

