


# Top Sirloin Pave

Sirloin B013

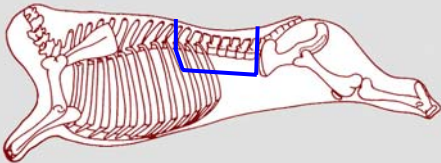

1. Position of the sirloin.

2. Remove the pave section from the rump side of the sirloin...

3. as illustrated.

4. Remove the top sirloin pave muscle by cutting close and on to the underlying gristle sheath.



5. Trim top sirloin pave muscle of excess fat.

6. Top sirloin pave ready for use.

