


Leg Joints (traditional)

Leg L006

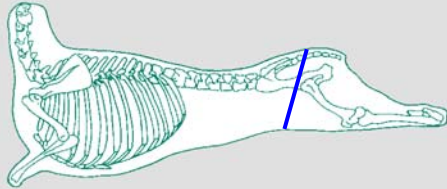

1. Position of the leg.

2. Remove the legs and chumps from the carcass, cutting between the last two lumbar vertebrae.

3. Split legs by cutting through the natural seam joining them.

4. Remove the chump by cutting and sawing along the line illustrated.



5. Remove the knuckle bone.



6. Cut the leg into two by cutting and sawing as illustrated.



7. Fillet leg end (left) and knuckle leg end (right) ready for sale.

