


Topside Roast

Leg L010



1. Position of leg and chump.

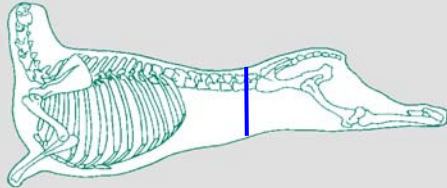

2. Leg and chump.



3. Remove aitch, back and tailbones.



4. Separate topside muscles by following the natural seam.



5. Topside (internal view).



6. Topside (external view). Maximum fat thickness 5mm.

