


Shoulder - boned and rolled

Forequarter L007



1. Position of shoulder.

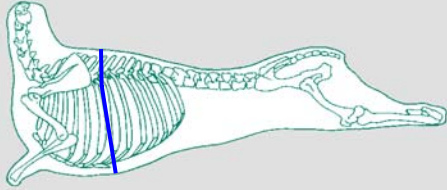

2. Shoulder of lamb.



3. Remove knuckle by cutting through the joint.



4. Carefully remove blade and shoulder bones.



5. Remove excess fat deposits.



6. Roll and tie joint securely with string at regular intervals.



7. Trim both ends.



8. Boned and rolled shoulder, ready for sale.

